



# CE LVD TEST REPORT

For

**GARDEN FIXTURES**

**Model No.:** VT-7662, VT-7652, VT-7651, VT-7642, VT-7641, VT-7632, VT-7631, VT-7622 PIR, VT-7622, VT-7621 PIR, VT-7621, VT-770, VT-769, VT-7677, VT-723 UG, VT-722, VT-721 UG, VT-7611, VT-7612, VT-7613, VT-7614, VT-7615, VT-7616, VT-7617, VT-7618

**Applicant :** V-TAC EXPORTS LIMITED

ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL,  
CENTRAL, HONGKONG

**Manufacturer :** V-TAC EXPORTS LIMITED

ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL,  
CENTRAL, HONGKONG

**Issued By :** Global-Standard Testing Service Co., Ltd.

Room 1911-1914, Noble Plaza, Qian Jin 1st Road, Bao An District,  
Shenzhen Guangdong China.

**Tel :** +86 755 33863599

**Email :** [Market@gstslab.com](mailto:Market@gstslab.com)

**Report Number :** D00.06.0447S-R2

**Issued Date :** April 19, 2019

**Date of Report :** April 19, 2019

**Note:**


1. The test data and result is based on the tested sample only.
2. Please verify information in the report on GST web: [www.gstslab.com](http://www.gstslab.com) through report number.
3. All rights reserve, the pirate edition investigates necessarily! This report shall not be reproduced unless under the authority of Global-Standard Testing Service Co., Ltd.

<b>EN60598-1</b> <b>Luminaires—Part 1 :General requirements and tests</b> <b>EN60598-2-2</b> <b>Part 2-2:Particular requirements</b> <b>Section Two – Recessed luminaires</b>	
Report reference No. ....:	D00.06.0447S-R2
Testing laboratory .....	Global-Standard Testing Service Co., Ltd.
Location.....:	Room 1911-1914, Noble Plaza, Qian Jin 1st Road, Bao An District, Shenzhen, Guangdong, China.
Applicant.....:	V-TAC EXPORTS LIMITED
Address:.....:	ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL, HONGKONG
Manufacturer :.....:	V-TAC EXPORTS LIMITED
Address.....:	ROOM NO.301, KAM ON BUILDING 176A QUEENS ROAD CENTRAL, CENTRAL, HONGKONG
Standards.....:	EN 60598-2-2: 2012 EN 60598-1: 2015+A1:2018 EN 62493: 2015
Procedure deviation.....:	N/A
Non-standard test method.....:	N/A
Type of test equipment .....	GARDEN FIXTURES
Trade mark.....:	
Model/Type designation.....:	VT-7662, VT-7652, VT-7651, VT-7642, VT-7641, VT-7632, VT-7631, VT-7622 PIR, VT-7622, VT-7621 PIR, VT-7621, VT-770, VT-769, VT-7677, VT-723 UG, VT-722, VT-721 UG, VT-7611, VT-7612, VT-7613, VT-7614, VT-7615, VT-7616, VT-7617, VT-7618
Rating.....:	220-240V~, 50/60Hz, GU10, Max.60W
TRF originator.....:	Global-Standard Testing Service Co., Ltd.
Copyright blank test report.....:	--
Test item particulars.....:	Continuous
Operating Condition.....:	N/A.
Tested for IT power systems...:	N/A.
IT testing, phase-phase voltage (V).....:	Class II equipment
Class of equipment.....:	IP65


Possible test case verdicts :	
test case does not apply to the test object	N(/A.)
test object does meet the requirement	P(ass)
test object does not meet the requirement	F(ail)

Name and address of the testing laboratory :


Global-Standard Testing Service Co., Ltd.  
Room 1911-1914, Noble Plaza, Qian Jin 1st Road, Bao An District,  
Shenzhen, Guangdong, China.

**Tested by :**  April 16, 2019  
Signature Date

Evan Chen / Engineer  
Name/title

**Reviewed by :**  April 19, 2019  
Signature Date


Gloria Wang / Project Engineer  
Name/title

**Approved by :**  April 19, 2019  
Signature Date

Nico Xie / Manager  
Name/title

<b>General remarks:</b>	
<p>Clause number between brackets refer to clauses in IEC 60598-1</p> <p>"(see remark #)" refers to a remark appended to the report.</p> <p>"(see appended table)" refers to a table appended to the report.</p> <p>Throughout this report a comma is used as the decimal separator.</p> <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>Unless otherwise specified, test are made under normal conditions at an ambient temperature within the range of 15°C to 35°C, RH45% to 75% and an air pressure of 860mbar of 1060mbar</p>	<p>Attachment with:</p> <p>1) Photo documentation</p>
<p>The test samples were pre-production samples without serial numbers. This report shall not be reproduced except in full without the written approval of the testing laboratory.</p> <p>1.This report covers the GARDEN FIXTURE with models VT-7662, VT-7652, VT-7651, VT-7642, VT-7641, VT-7632, VT-7631, VT-7622 PIR, VT-7622, VT-7621 PIR, VT-7621, VT-770, VT-769, VT-7677, VT-723 UG, VT-722, VT-721 UG, VT-7611, VT-7612, VT-7613, VT-7614, VT-7615, VT-7616, VT-7617, VT-7618.</p> <p>2.All models have the same construction except for wattage and dimension.</p> <p>3.The model VT-7677 was selected representative sample to perform all testing.</p> <p>4. The standard of EN 62493 have been considered with positive result in this report.</p> <p>5. This report is based on report D00.06.0447S-R1 which issued on January 02, 2018.</p>	

**Label:**

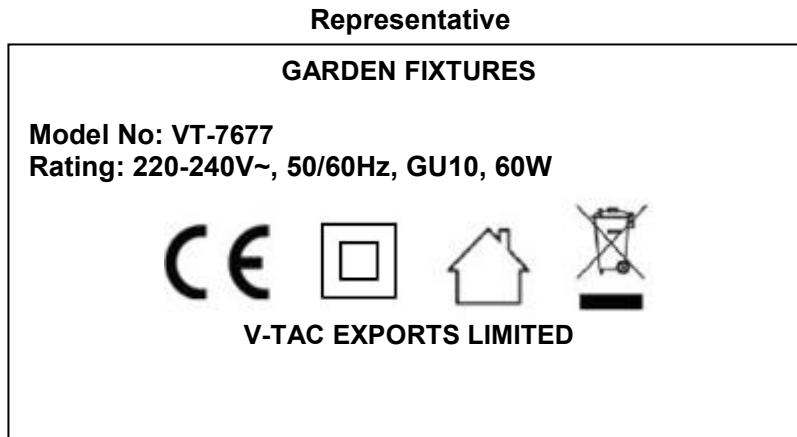

**Note:**

1. Due to similarity of the rating with labels, only above label is listed.
2. All labels have same format except for model name and parameter with wattage
3. The height of WEEE directive mark is at least 7mm. The height of CE and class II directive at least 5mm.

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>2.1 (0)</b>	<b>SCOPE</b>		P
<b>2.2 (0.1)</b>	<b>Information for luminaire design concerned .....</b>	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
2.2 (0.3)	More sections applicable.....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
<b>2.4 (2)</b>	<b>CLASSIFICATION</b>		P
2.4 (2.2)	Type of protection.....	Class II	—
2.4 (2.3)	Degree of protection.....	IP65	—
2.4 (2.4)	Luminaire only suitable for non-combustible surfaces .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Luminaire suitable for normally flammable surfaces.....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Luminaire suitable to be covered by insulating materials .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
2.4 (2.5)	Luminaire for normal use .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
<b>2.5 (3)</b>	<b>MARKING</b>		P
2.5.1 (-)	Warning notice, if not suitable for insulating ceiling		P
2.5 (3.2)	Mandatory markings		P
	Position of the marking	On the body	P
	Format of symbols/text		P
2.5 (3.3)	Additional information		P
	Language of instructions	English	P
2.5 (3.3.1)	Combination luminaires		N/A
2.5 (3.3.2)	Nominal frequency in Hz	50/60Hz	P
2.5 (3.3.3)	Operating temperatures		N/A
2.5 (3.3.4)	Symbol or warning notice		N/A
2.5 (3.3.5)	Wiring diagram		N/A
2.5 (3.3.6)	Special conditions		N/A
2.5 (3.3.7)	Metal halide lamp luminaire – warning		N/A
2.5 (3.3.8)	Limitation for semi-luminaires		N/A
2.5 (3.3.9)	Power factor and supply current		N/A
2.5 (3.3.10)	Suitability for use indoor		P
2.5 (3.3.11)	Luminaires with remote control		N/A
2.5 (3.3.12)	Clip-mounted luminaire-warning		N/A
2.5 (3.3.13)	Specifications of protective shields		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.5 (3.3.14)	Symbol for nature of supply	~	P
2.5 (3.3.15)	Rated current of socket outlet		N/A
2.5 (3.3.16)	Rough service luminaire		N/A
2.5 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		N/A
2.5 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
2.5 (3.3.101)	Adequate warning on the package (EN)		N/A
2.5 (3.4)	Test with water	Legible	P
	Test with hexane	Legible	P
	Legible after test	Yes	P
	Label attached	Yes	P
<b>2.6 (4)</b>	<b>CONSTRUCTION</b>		P
2.6 (4.2)	Components replaceable without difficulty		P
2.6 (4.3)	Wireways smooth and free from sharp edges		P
2.6 (4.4)	Lampholders		P
2.6 (4.4.1)	Integral lampholder		N/A
2.6 (4.4.2)	Wiring connection		P
2.6 (4.4.3)	Lampholder for end-to-end mounting		P
2.6 (4.4.4)	Positioning		P
	- pressure test (N).....:		P
	- bending test (Nm).....:		N/A
2.6 (4.4.5)	Peak pulse voltage		N/A
2.6 (4.4.6)	Centre contact		N/A
2.6 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
2.6 (4.4.8)	Lamp connectors		N/A
2.6 (4.4.9)	Caps and bases correctly used		N/A
2.6 (4.5)	Starter holders		N/A
	Starter holders in luminaires other than class II		N/A
	Starter holder class II construction		N/A
2.6 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.6 (4.7)	Terminals and supply connections		P
2.6 (4.7.1)	Contact to metal parts		P
2.6 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
2.6 (4.7.3)	Terminals for supply conductors		N/A
2.6 (4.7.3.1)	Welded connections:		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.8.2		N/A
	- electrical test according to 15.9		N/A
	- heat test according to 15.9.2.3 and 15.9.2.4		N/A
2.6 (4.7.4)	Terminals other than supply connection		P
2.6 (4.7.5)	Heat-resistant wiring/sleeves		N/A
2.6 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
2.6 (4.8)	Switches:		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
2.6 (4.9)	Insulating lining and sleeves		N/A
2.6 (4.9.1)	Retainment		N/A
	Method of fixing.....:		N/A
2.6 (4.9.2)	Insulated linings and sleeves		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C) .....		N/A
2.6 (4.10)	Insulation of Class II luminaires		N/A
2.6 (4.10.1)	No contact, mounting surface - accessible metal parts - wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A
2.6 (4.10.2)	Assembly gaps:		N/A



IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- not coincidental		N/A
	- no straight access with test probe		N/A
2.6 (4.10.3)	Retainment of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lampholder		N/A
2.6 (4.11)	Electrical connections		P
2.6 (4.11.1)	Contact pressure		P
2.6 (4.11.2)	Screws:		P
	- self-tapping screws		P
	- thread-cutting screws		N/A
	- at least two self-tapping screws		N/A
2.6 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
2.6 (4.11.4)	Material of current-carrying parts		N/A
2.6 (4.11.5)	No contact to wood		P
2.6 (4.11.6)	Electro-mechanical contact systems		N/A
2.6 (4.12)	Mechanical connections and glands		N/A
2.6 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... : 0.80Nm; Fixed enclosure		P
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
2.6 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
2.6 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)..... :		N/A
	- lampholder; torque (Nm)..... :		N/A
	- push-button switches; torque 0,8 Nm..... :		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.6 (4.12.5)	Screwed glands; force (N).....:		N/A
2.6 (4.13)	Mechanical strength		P
2.6 (4.13.1)	Impact tests:		P
2.6.1 (-)	- recessed parts providing protection against electric shock; energy (Nm).....:		N/A
	- other recessed parts; energy (Nm).....:		N/A
2.6 (4.13.1)	- fragile parts; energy (Nm).....:		N/A
	- other parts; energy (Nm).....:	0.35Nm	P
	1) live parts		P
	2) linings		N/A
	3) protection		P
	4) covers		N/A
2.6 (4.13.3)	Straight test finger	30N	P
2.6 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
2.6 (4.13.6)	Tumbling barrel		N/A
2.6 (4.14)	Suspensions and adjusting devices		N/A
2.6 (4.14.1)	Mechanical load:		P
	A) four times the weight	0.87Kg x 4	P
	B) torque 2,5 Nm .....		P
	C) bracket arm; bending moment (Nm).....:		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm).....:		P
	metal rod. Diameter (mm).....:		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.6 (4.14.2)	Load to flexible cables		N/A
	Mass (kg):		N/A
	Stress in conductors (N/mm <sup>2</sup> ):		N/A
	Semi-luminaires - mass (kg):		N/A
	Semi-luminaires - bending moment (Nm):		N/A
2.6 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles..... :		N/A
	- strands broken		N/A
	- electric strength test afterwards		N/A
2.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
2.6 (4.14.5)	Guide pulleys		N/A
2.6 (4.14.6)	Strain on socket-outlets		N/A
2.6 (4.15)	Flammable materials:		P
	- glow-wire test 650 °C	Enclosure, no flame	P
	- spacing $\geq$ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		N/A
	- thermal protection		N/A
	- electronic circuits exempted		N/A
1.6 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
2.6 (4.16)	Luminaires marked with F-symbol		N/A
	No lamp control gear		N/A
2.6 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
2.6 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
2.6 (4.16.3)	"F" curve measured		N/A
2.6 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
2.6 (4.18)	Resistance to corrosion:		N/A
2.6 (4.18.1)	- rust-resistance		N/A
2.6 (4.18.2)	- season cracking in copper		N/A
2.6 (4.18.3)	- corrosion of aluminium		N/A
2.6 (4.19)	Igniters compatible with ballast		N/A
2.6 (4.20)	Rough service vibration		N/A
2.6 (4.21)	Protective shield:		N/A
2.6 (4.21.1)	Shield fitted		N/A
2.6 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
2.6 (4.21.3)	No direct path		P
2.6 (4.21.4)	Impact test on shield		P
	Glow-wire test on lamp compartment		P
2.6 (4.22)	Attachments to lamps		N/A
2.6 (4.23)	Semi-luminaires comply class II		P
2.6 (4.24)	UV radiation, metal halide lamps		N/A
2.6 (4.25)	No sharp point or edges		P
2.6 (4.26)	Short-circuit protection:		N/A
2.6 (4.26.1)	Uninsulated accessible SELV parts		N/A
2.6 (4.26.2)	Short-circuit test		N/A
2.6 (4.26.3)	Test chain according to Figure 29		P

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
<b>2.7 (11)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		P
	Working voltage (V).....:	220-240V~	—
	Voltage form	Sinusoidal <input checked="" type="checkbox"/> Non-sinusoidal <input type="checkbox"/>	— —
	PTI	< 600 <input checked="" type="checkbox"/> > 600 <input type="checkbox"/>	—
	Rated pulse voltage (kV).....:		—
	(1) Current-carrying parts of different polarity: cr (mm); cl (mm).....:		P
	(2) Current-carrying parts and accessible parts: cr (mm); cl (mm).....:		P
	(3) Parts becoming live due to breakdown of basic insulation and metal parts: cr (mm); cl (mm).....:		N/A
	(4) Outer surface of cable where it is clamped and metal parts: cr (mm); cl (mm).....:		N/A
	(5) Not used		N/A
	(6) Current-carrying parts and supporting surface: cr (mm); cl (mm).....:		P
<b>2.8 (7)</b>	<b>PROVISION FOR EARTHING</b>		N/A
2.8 (7.2.1 + 7.2.3)	Accessible metal parts		N/A
	Metal parts in contact with supporting surface		N/A
	Resistance < 0,5 Ω		N/A
	Two self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Earth makes contact first		N/A
2.8 (7.2.2 + 7.2.3)	Earth continuity in joints etc.		N/A
2.8 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
2.8 (7.2.5)	Earth terminal integral part of connector socket		N/A
2.8 (7.2.6)	Earth terminal adjacent to mains terminals		N/A
2.8 (7.2.7)	Electrolytic corrosion of the earth terminal		N/A
2.8 (7.2.8)	Material of earth terminal		N/A
	Contact surface bare metal		N/A
2.8 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.8 (7.2.11)	Earthing core coloured green-yellow		N/A
	Length of earth conductor		N/A
<b>2.9 (14)</b>	<b>SCREW TERMINALS</b>		N/A
	Separately approved; component list		N/A
	Part of the luminaire		N/A
<b>2.9 (15)</b>	<b>SCREWLESS TERMINALS</b>		N/A
	Separately approved; component list		N/A
	Part of the luminaire	(see Annex 4)	N/A
<b>2.10 (5)</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		P
2.10 (5.2)	Supply connection and external wiring		P
2.10 (5.2.1)	Means of connection.....:		P
	Connecting leads (EN)		P
	- without a means for connection to the supply		N/A
	- terminal block specified		P
	- relevant information provided		N/A
	- compliance with 4.6, 4.7.1, 4.7.2, 4.10.1, 11.2, 12 and 13.2 of Part 1		N/A
2.10 (5.2.2)	Type of cable.....:		P
	Cables equal to HD21 S2 or HD22 S2 (EN)		N/A
	Nominal cross-sectional area (mm <sup>2</sup> ).....:		N/A
2.10 (5.2.3)	Type of attachment, X, Y or Z	Type Y	P
2.10 (5.2.5)	Type Z not connected to screws		N/A
2.10 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
2.10 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
2.10 (5.2.8)	Insulating bushings:		P
	- suitably fixed		P
	- material in bushings		P
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		P

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.10 (5.2.9)	Locking of screwed bushings		N/A
2.10 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P
2.10 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
2.10 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		P
2.10 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N).....:		P
	- torque test: torque (Nm)..... :		P
	- displacement $\leq 2$ mm		P
	- no movement of conductors		P
	- no damage of cable or cord		P
2.10 (5.2.11)	External wiring passing into luminaire		P
2.10 (5.2.12)	Looping-in terminals		N/A
2.10 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
2.10 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.10 (5.2.15)	Colour code low voltage (EN)		N/A
2.10 (5.2.16)	Appliance inlets (IEC 60320)		P
	Appliance couplers of class II type		P
2.10 (5.2.17)	Non standardized interconnecting cables properly assembled		N/A
2.10 (5.2.18)	Used plug in accordance with:		N/A
	- IEC 60083		N/A
	- other standard		N/A
2.10 (5.3)	Internal wiring		P
2.10 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		P
	- not delivered/ mounting instruction		P
	- factory assembled		P
	- socket outlet loaded (A)..... :		N/A
	- temperatures..... : (see Annex 2)		P
	Green-yellow for earth only		N/A
2.10 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm <sup>2</sup> )..... :	0.5 mm <sup>2</sup>	P
	Insulation thickness	0.6m	P
	Extra insulation added where necessary		N/A
2.10 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Adequate cross-sectional area and insulation thickness		P
2.10 (5.3.1.3)	Double or reinforced insulation for class II		P
2.10 (5.3.1.4)	Conductors without insulation		N/A
2.10 (5.3.1.5)	SELV current-carrying parts		P
2.10 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
2.10 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		P
	Joints, raising/lowering devices		N/A



IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
2.10 (5.3.3)	Insulating bushings:		P
	- suitable fixed		P
	- material in bushings		P
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
2.10 (5.3.4)	Joints and junctions effectively insulated		P
2.10 (5.3.5)	Strain on internal wiring		N/A
2.10 (5.3.6)	Wire carriers		N/A
2.10 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		N/A
<b>2.11 (8)</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		P
2.11 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Protection in any position		P
	Double-ended tungsten filament lamp		P
	Insulation lacquer not reliable		P
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
2.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
2.11 (8.2.3)	Class II luminaire:		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
	Class I luminaire with BC lampholder		N/A
2.11 (8.2.4)	Portable luminaire:		N/A
	- protection independent of supporting surface		N/A
	- terminal block completely covered		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
2.11 (8.2.5)	Compliance with the standard test finger or relevant probe		P
2.11 (8.2.6)	Covers reliably secured		P
2.11 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$		N/A
	Portable plug connected luminaire with capacitor		N/A
	Other plug connected luminaire with capacitor		N/A
	Discharge device on or within capacitor		N/A
	Discharge device mounted separately		N/A
<b>2.12 (12)</b>	<b>ENDURANCE TEST AND THERMAL TEST</b>		P
2.12 (12.3)	Endurance test:		P
	- mounting- position.....: Normal position		—
	- test temperature ( $^{\circ}\text{C}$ ).....: $35^{\circ}\text{C}$		—
	- total duration (h).....: 240h		—
	- supply voltage: Un factor; calculated voltage (V) 254.4V~		—
	- lamp used.....: Incandescent bulb		—
2.12 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
2.12 (12.4)	Thermal test (normal operation)		P
2.12 (12.5)	Thermal test (abnormal operation)		P
2.12 (12.6)	Thermal test (failed lamp control gear condition):		N/A
2.12 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A) .....		—
	- case of abnormal conditions.....:		—
	- electronic lamp control gear		N/A
	- measured winding temperature ( $^{\circ}\text{C}$ ): at 1,1 Un...:		—
	- measured mounting surface temperature ( $^{\circ}\text{C}$ ): at 1,1 Un:		N/A
	- calculated mounting surface temperature ( $^{\circ}\text{C}$ )....:		N/A
	- track- mounted luminaires		N/A
2.12 (12.6.2)	Temperature sensing control		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- case of abnormal conditions..... :		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C): ... :		N/A
	- track-mounted luminaires		N/A
2.12 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
2.12 (12.7.1)	Through wiring or looping-in wiring loaded by a current of (A) ..... :		—
	- case of abnormal conditions..... :		—
	- measured winding temperature (°C) at 1,1 Un.... :		—
	- measured temperature of fixing point/ exposed part (°C) at 1,1 Un..... :		N/A
	- calculated temperature of fixing point/ exposed part (°C)..... :		N/A
2.12 (12.7.2)	Temperature sensing control		N/A
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured temperature of fixing point/ exposed part (°C) ..... :		N/A
<b>2.13 (9)</b>	<b>RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE</b>		P
2.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP..... : IP65		—
	- mounting position during test..... :		—
	- fixing screws tightened; torque (Nm)..... :		—
	- tests according to clauses..... :		—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		P
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or where it could become a hazard		N/A
	d) i) For luminaires without drain holes – no water entry		N/A
	d) ii) For luminaires with drain holes – no hazardous water entry		P
	e) no water in watertight luminaire		P
	f) no contact with live parts (IP 2X)		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
	f) no entry into enclosure (IP 3X and IP 4X)		N/A
	f) no contact with live parts (IP 3X and IP 4X)		N/A
2.13 (9.3)	Humidity test 48 h	25°C, 93%RH, 48h	P
<b>2.14 (10)</b>	<b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>		P
2.14 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø .....		—
	Insulation resistance (MΩ):		P
	SELV:		P
	- between current-carrying parts of different polarity .....	100MΩ	P
	- between current-carrying parts and mounting surface.....	100MΩ	P
	- between current-carrying parts and metal parts of the luminaire.....	100MΩ	P
	Other than SELV:		N/A
	- between live parts of different polarity.....		N/A
	- between live parts and mounting surface.....		N/A
	- between live parts and metal parts.....		N/A
	- between live parts of different polarity through action of a switch.....		N/A
2.14 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test	No ignitor	N/A
	Luminaires with manual ignitors	No manual ignitor	N/A
	Test voltage (V):		P
	SELV:		P
	- between current-carrying parts of different polarity:	500VAC	N/A
	- between current-carrying parts and mounting surface.....		N/A
	- between current-carrying parts and metal parts of the luminaire.....	500VAC	N/A
	Other than SELV:		N/A
	- between live parts of different polarity.....	1480V	P
	- between live parts and mounting surface.....		N/A
	- between live parts and metal parts.....	1480V	P

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
	- between live parts of different polarity through action of a switch..... :		N/A
2.14 (10.3.1)	Leakage current (mA)..... :		N/A
<b>2.15 (13)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		N/A
2.15 (13.2.1)	Ball-pressure test:		N/A
	- part tested; temperature (°C)..... :		N/A
	- part tested; temperature (°C)..... :		N/A
2.15 (13.3.1)	Needle flame test (10 s):		N/A
	- part tested..... :		N/A
	- part tested..... :		N/A
2.15 (13.3.2)	Glow-wire test (650°C):		N/A
	- part tested..... :		N/A
	- part tested..... :		N/A
2.15 (13.4.1)	Tracking test: part tested..... :		N/A

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		N/A
(2.2)	Class 0 not accepted		N/A
(3.3)	DK: power supply cord with label		N/A
	IT: warning label on Class 0 luminaire		N/A
(4.5.1)	DK: socket-outlets		N/A
(4.5.1)	FR: socket-outlets		N/A
(5.2.1)	CY, DK, FI, SE, GB: type of plug		N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
(13.3)	DK: Needle flame test during 30 s		N/A
(13.3)	GB: Requirements according to United Kingdom Building Regulation		N/A
(13.3.2)	FR: Glow-wire test 850°C alt. 750°C for luminaires in premises open to public or 960°C for luminaires in emergency exits		N/A

	ANNEX 3: screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm <sup>2</sup> ).....:		N/A
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)....:	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)..... :		N/A
	Torque (Nm)..... :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N).....:		N/A
(14.4.8)	Without undue damage		N/A
	ANNEX 4: screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5.1)	Terminals internal wiring		N/A
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples)		N/A

IEC 60598-2-2			
Clause	Requirement + Test	Result - Remark	Verdict
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.2)	Permanent connections: pull-off test (20 N)		N/A
(15.6)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples).....:		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles.....:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.7)	Terminals external wiring		N/A
	Terminal size and rating		N/A
(15.8.1)	Pull test spring-type terminals or wedged connections (4 samples); pull (N) .....		N/A
	Pull test pin or tab terminals (4 samples); pull (N) .....		N/A

**IEC 60598-2-2**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE	List of critical components and materials			
Component	manufacturers / trademark	Type / model	Value / rating	Approval/Reference
Input wire	Various	1332	VW-1, 300V, 105°C, 18AWG	Test with appliance and UL
GU10 lampholder	Ningbo Lai Ting Electrical Appliance Co., Ltd.	GU10-1	250 V; 2A; T210	VDE

	ANNEX 2: temperature measurements, thermal tests of Section 12	P
	Lamp used.....: VT-7677	—
	Ballast used.....: No	—
	Mounting position of luminaire.....: As in normal use	—
	Supply wattage (W).....: 100.10W	—
	Supply current (A).....: 0.44A	—
	Table: measured temperatures corrected for Ta = 25°C:	P
	- abnormal operating mode.....: —	—
	- test 1: rated voltage.....: —	—
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage.....: 254.4V~	—
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage.....: —	—
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage.....: —	—

temperature (C) of part	clause 12.4 - normal				clause 12.5 - abnormal	
	test 1	test 2	test 3	limits	test 4	limit
Input wire	—	35.9	—	105	—	—
Lamp guard	—	48.9	—	70	—	—
Lampholder rim	—	106.3	—	210	—	—
Lampholder contact	—	99.5	—	210	—	—
Mounting surface	—	35.3	—	90	—	—
Ambient	—	25.0	—	25	—	—



**ANNEX 3: Summary report of EMF (IEC 62493:2009/EN 62493:2010)**


Summary report of EMF (IEC 62493:2009/EN 62493:2010)		
1	Scope	--
	<input checked="" type="checkbox"/> General lighting equipment	--
	<input type="checkbox"/> Lighting part for general lighting of multi-function equipment	--
	<input type="checkbox"/> Independent auxiliaries exclusively for the use with lighting equipment	--
	<input type="checkbox"/> Others, please specify:	--
4	Limits	--
4.2	Lighting equipment, as described in the scope, complies with this standard if it fulfils all of the following requirements See test report with No.: 64.740.12.03353.01(F)	P
4.3	Lighting equipment deemed to comply without testing Lighting equipment without electronic control gear is deemed to comply with the requirements of the standard without testing. All kind of ignitors, starters, switches, dimmers (including phase control units e.g. triac, GTO) and sensors are not considered as electronic control gear.	N/A

## Appendix 1

### Photo Documentation

<p>Photo 1</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> Internal</p>	
--	---

<p>Photo 2</p> <p>View:</p> <p><input checked="" type="checkbox"/> Front</p> <p><input type="checkbox"/> Rear</p> <p><input type="checkbox"/> Right side</p> <p><input type="checkbox"/> Left side</p> <p><input type="checkbox"/> Top</p> <p><input type="checkbox"/> Bottom</p> <p><input type="checkbox"/> Internal</p>	
--	--

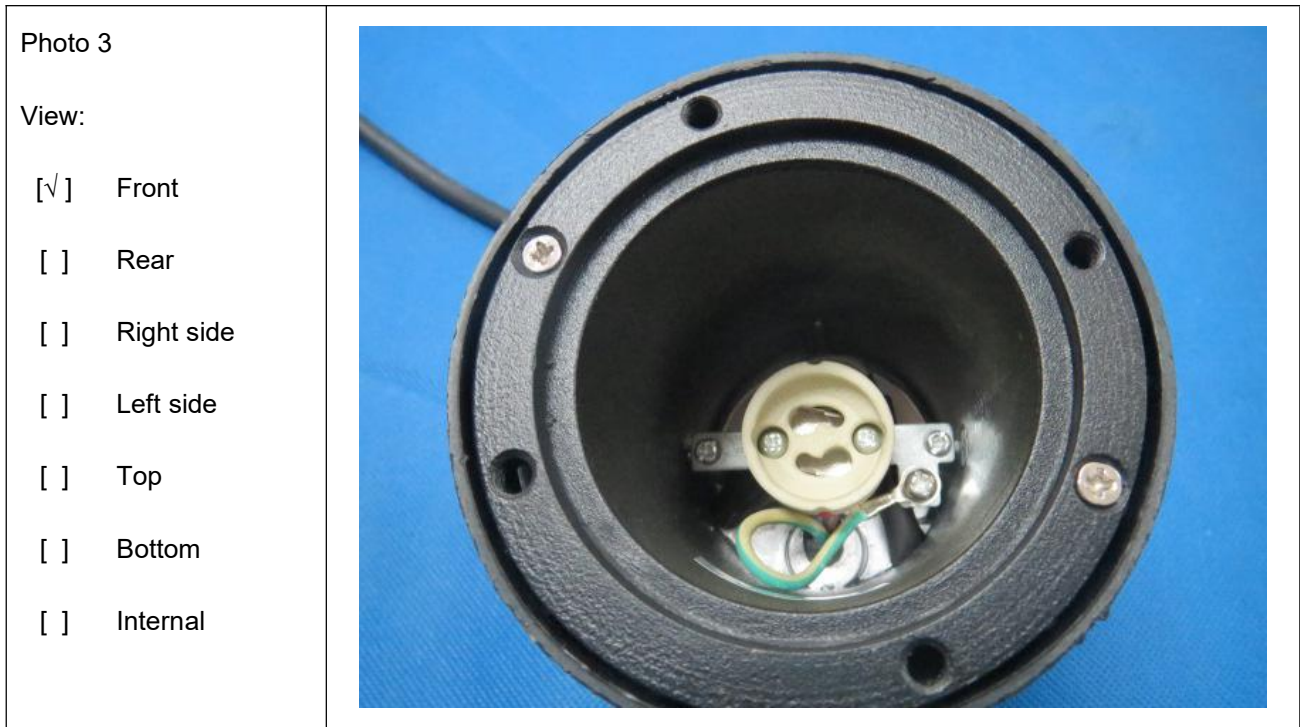

---END---