


C3WN

C3WN

Strong Wireless Connectivity

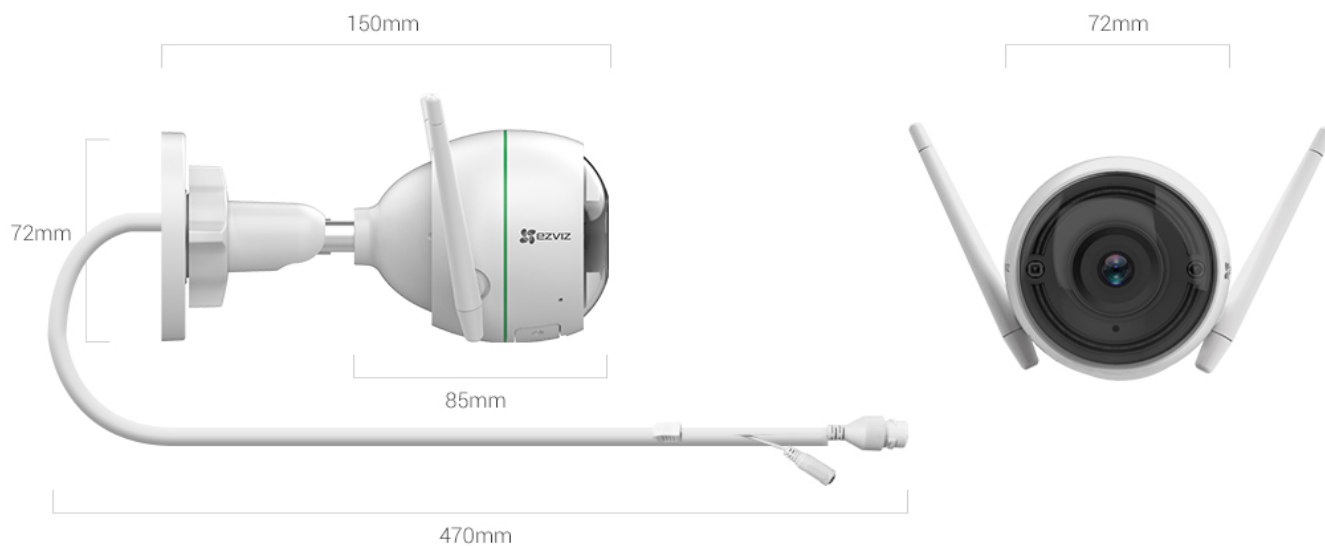

Specifications

Model Parameters



Security Cameras

Smart Home

Alarms & Sensors

More Products

C3WN

Camera

Image Sensor	1/2.9" Progressive Scan CMOS
Minimum Illumination	0.02 lux @(F2.0, AGC ON), 0 lux with IR
Shutter Speed	Self-adaptive shutter
Lens	2.8mm @ F1.8, view angle: 95° (Horizontal), 110°(Diagonal) 4mm@ F2.0, view angle: 81° (Horizontal), 94°(Diagonal)
Lens Mount	M12
Day & Night	IR-cut filter
DNR	3D DNR
WDR	Digital WDR

Compression

Video Compression	H.264
H.264 Type	Main profile
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate
Auto Bit Rate	Self-adaptive

Image

Max. Resolution	1920 x 1080
Frame Rate	Max: 30fps; Self-Adaptive during network transmission

Interface

Storage
C3WN

Micro SD card (Max. 256G)

Wired Network

RJ45 × 1(10M/100M Adaptive Ethernet Port)

Network

Smart Alarm	Motion detection
Wi-Fi Pairing	AP pairing
Protocol	EZVIZ Cloud proprietary protocol
Interface Protocol	EZVIZ Cloud proprietary protocol
General Features	Anti-Flicker, Dual-Stream, Heart Beat, Mirror Image, Password Protection, Watermark
Max. Bitrate	2Mbps

Wi-Fi

Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 144Mbps

General

Power Supply	DC 12V/1A
Power Consumption	Max. 6W
IP Grade	IP66
IR Range	Max. 30 meters (98.43ft)
Product Dimensions	72mm x 72mm x 150 mm (2.83 x 2.83 x 5.91")